

Poly





Powerguard Insurance Global Coverage

The power output shall not be less than 97.5% of the minimum power output stated in the product data sheet in the first year of the product's life cycle. The loss of power output shall not exceed 0.7% per year thereafter, ending with 80.7% in the 25th year.

■ CSUN ■ Standard warranty

CSUN's NEW linear performance warranty

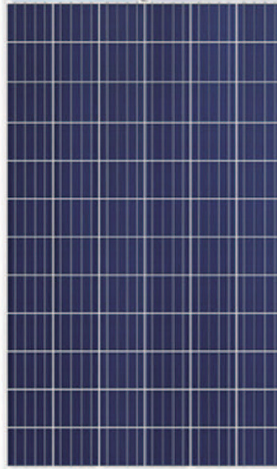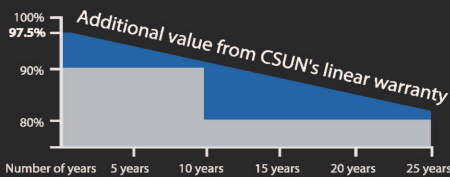

CSUN320-72P

Premier choice for large scale project

Module Fire Performance: Type 1 (UL 1703)

Fire Resistance Rating: Class C (IEC 61730)

CSUN320-72P CSUN315-72P

CSUN310-72P CSUN305-72P

CSUN300-72P

16.52%
Module efficiency

320 W
Highest power output

10 years
Material & workmanship warranty

25 years
Linear power output warranty



Industry leading conversion efficiency



Positive tolerance offer



Passed salt mist & ammonia corrosion, blowing sand and hail testing



Certificated to withstand wind (2400 Pa) and snow load (5400 Pa)



Excellent performance under weak light condition



Good temperature coefficient enables better output in hot climates

- China Sunergy Co., Ltd. designs, manufactures and delivers high efficiency solar cells and modules to the world from its production centers based in China, Turkey, South Korea and Vietnam.
- Founded in 2004, China Sunergy is well known for its advanced solar cell technology, reliable product quality, and excellent customer service.
- As one of leading PV enterprises, China Sunergy has delivered more than 4.0GW of solar products to residential, commercial, utility and off-grid projects all around the world.

* Note: All specifications, warranties, certifications about module of „CSUN“ series also apply to that of „SST“.

All information and data are subject to change without notice and are provided without liability.



Electrical Characteristics at Standard Test Conditions (STC)

Module Type	CSUN 320-72P	CSUN 315-72P	CSUN 310-72P	CSUN 305-72P	CSUN 300-72P
Maximum Power - P _{mpp} (W)	320	315	310	305	300
Positive Power Tolerance	0~3%	0~3%	0~3%	0~3%	0~3%
Open Circuit Voltage - Voc (V)	45.0	44.9	44.8	44.7	44.5
Short Circuit Current - I _{sc} (A)	9.17	9.11	9.03	8.97	8.91
Maximum Power Voltage - V _{mpp} (V)	36.2	36.1	36.0	35.9	35.8
Maximum Power Current - I _{mpp} (A)	8.84	8.73	8.61	8.50	8.37
Module Efficiency	16.52%	16.27%	16.01%	15.75%	15.49%

Electrical data relates to standard test conditions (STC): Irradiance 1000W/m²; AM 1.5; cell temperature 25°C measuring uncertainty of power is within ±3%. Certified in accordance with IEC61215, IEC61730-1/2 and UL 1703

Electrical Characteristics at Nominal Operating Cell Temperature (NOCT)

Module Type	CSUN 320-72P	CSUN 315-72P	CSUN 310-72P	CSUN 305-72P	CSUN 300-72P
Maximum Power - P _{mpp} (W)	235	232	228	225	220
Maximum Power Voltage - V _{mpp} (V)	34.1	33.8	33.5	33.2	32.9
Maximum Power Current - I _{mpp} (A)	6.89	6.86	6.80	6.77	6.71
Open Circuit Voltage - Voc (V)	41.6	41.5	41.4	41.3	41.1
Short Circuit Current - I _{sc} (A)	7.40	7.34	7.30	7.24	7.19

Electrical data relates to nominal operating cell temperature (NOCT): Irradiance 800W/m²; wind speed 1 m/s; cell temperature 45°C; ambient temperature 20°C measuring uncertainty of power is within ±3%.

Temperature Characteristics

Voltage Temperature Coefficient	-0.292%/K
Current Temperature Coefficient	+0.045%/K
Power Temperature Coefficient	-0.408%/K

Maximum Ratings

Maximum System Voltage (V)	1000
Series Fuse Rating (A)	20
Reverse Current Overload (A)	27

Mechanical Characteristics

Dimensions	1956 × 990 × 50 mm
Weight	22.3 kg
Frame	Anodized aluminum profile
Front glass	Toughened low iron glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	6x12 polycrystalline solar cells (4BB or 5BB 156 X156mm)
Junction Box	Rated current ≥ 12A, IP ≥ 65, TUV & UL
Cable	Length 900 mm, 1 × 4 mm ²
Connector	MC 4/ compatible with MC 4

Packaging



Container 20'	252 pcs.
Container 40'	504 pcs.
Container 40'HC	552 pcs.

System Design

Temp. Range	-40°C to +85°C
Hail	Max. diameter of 25mm with 23m/s impact speed
Max. Capacity	Snow 5400 Pa, wind 2400 Pa
Application Class	A
Safety Class	II

Dimensions

Note: mm (inch)

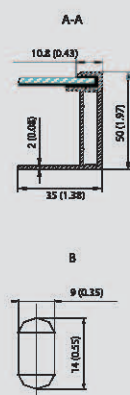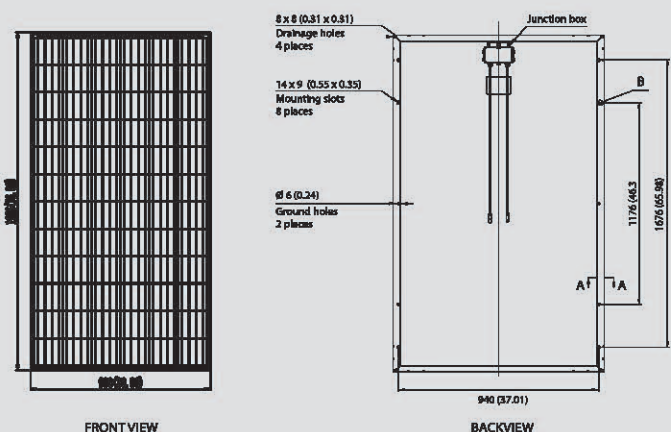

IV-Curves

